

BORAL PAVERS
Build something great™



Soho® in Spring



soho®

Porcelain Pavers - 20mm

soho® outdoor porcelain pavers



Soho®, has captured the essence of natural stone, elaborating and harmonising it with an industrial interpretation in high performance porcelain stoneware, guaranteeing the technical features and low maintenance requirements of modern outdoor tiles. Soho® is the perfect and versatile solution for outdoor applications. Available in 600mm x 600mm with complimenting treads, available in 3 modern colours.

- Stain resistant
- Easy to clean
- Slip resistant
- Colour durable
- High strength
- Stylish

Colour Details

Soho® is available in three natural, chromatic hues that meet the needs of today's planners and designers, carefully balanced in warm and cold tints.



PRINCE



SPRING



BROOME

About This Product

Product Name: Soho®

Soho® Colours: Prince, Spring, Broome

Units Per m²: 2.78


Pieces Per Pallet: 48

Weight Per Pallet: 790kgs


Size: 600mm L x 600mm W x 20mm thick

Applications: Domestic and commercial pedestrian use, swimming pools and light vehicular traffic (adhesive method only).*

*up to 8 tonne maximum

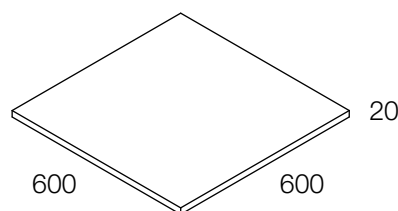

Standard Unit


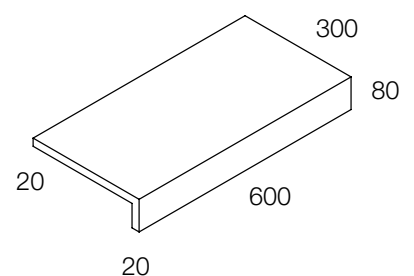


Tread

soho[®] outdoor porcelain pavers



Suggested Install Methods

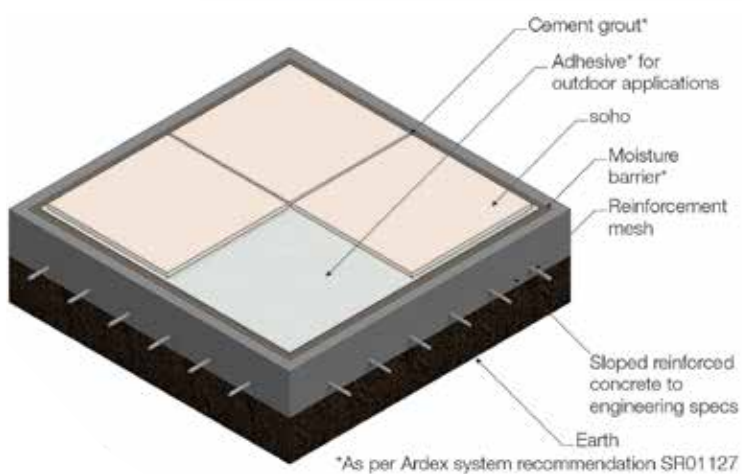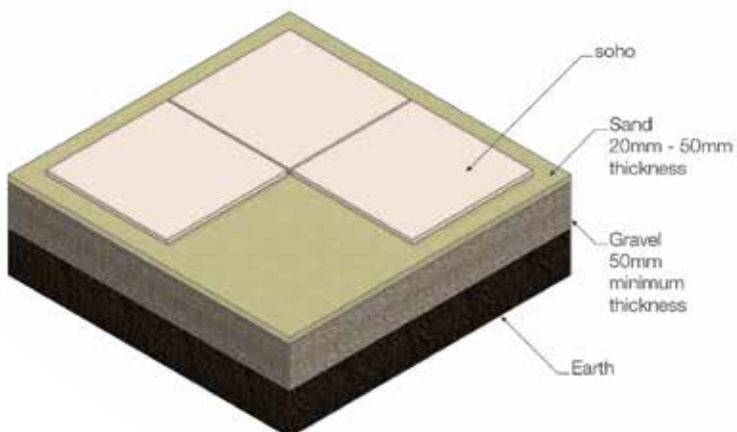

Product Specification

Slip and Skid Resistance: AS/NZS 4586:2013:

Classification R11 (Wet Oil ramp test)


Slip Resistance Appendix A (Wet Pendulum) P5

Size: 600mm x 600mm nominal

Pack Size: 2 pieces = 0.72m²

Weight: 16.45kgs per piece (600mm x 600mm x 20mm)

Shade Variation: V4 (high)

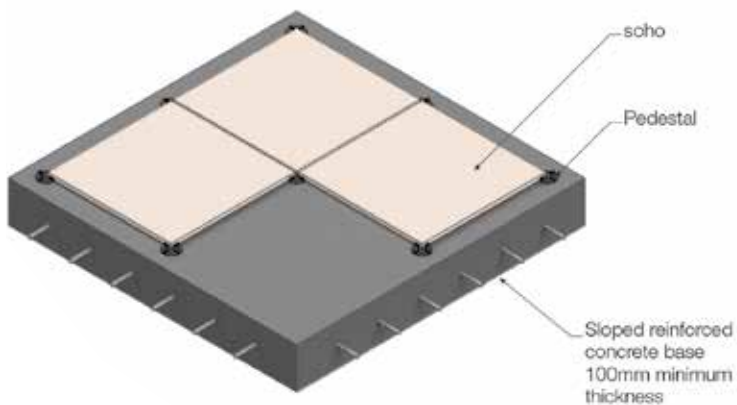

Technical Data

TECHNICAL DATA	STANDARD	INTERNATIONAL STANDARDS	*SOHO® AVERAGE VALUE
Size Characteristics			
Sides	En Iso 10545-2	± 0,6% Max (± 2,0 Mm Max)	Complying
Thickness	En Iso 10545-2	± 5,0% Max (± 0,5 Mm Max)	Complying
Water Absorption	En Iso 10545-3	0,5%	0,05%
Flexion Resistance	En Iso 10545-4 En 1339	S 1.300 N (> 7,5 Mm) R 35 N/Mm ² —	S 13.671 N R 51,7 N/Mm ² T 11*
Impact Resistance	En Iso 10545-5	Declared Value	0,88
Abrasion Resistance	En Iso 10545-6	175 Mm ³	139 Mm ³
Coefficient Of Linear Thermal-Expansion	En Iso 10545-8	—	6,3 X10 ⁻⁶ C ⁻¹
Resistance To Thermal Shocks	En Iso 10545-9	Pass According En Iso 10545-1	No Damage
Frost Resistance	En Iso 10545-12	Pass According En Iso 10545-1	No Damage
Resistance To Chemicals	En Iso 10545-13	Ub Min.	Ua Ula Uha
Resistance To Stains	En Iso 10545-14	Declared Value	5
Static Load (600X600mm)	En 12825	— — —	Centre 6,40 Kn Centre Point Of Side 7,43 Kn Diagonal 4,14 Kn

Porcelain Soho® Advantages



Colour durability

Permanent colour that will not fade.



Strength

High breakage loads of up to 1000kg allows for breakage reduction.



Easy installation

Perfect fit makes for fast installation.



Stain resistant

High compressive strength and ultra-low absorption rate creates a dense surface that resists mould, moss, dirt and other staining.



Easy to clean

Household cleaners can be used to wipe down spills and dirt; pressure washing can even be done in select installation applications*.



Slip/Skid-resistant

Structured paver textures creates a non-slip surface for safety; perfect for around pools/spas or in wet climates. R11 classification.



Stylish

Matches the very latest trends for inside and outside the home.



Light weight

16.45g per 600x600mm paver permit for easy installation, removal and serviceability and even reusability (Excluding adhered installations).

*It is important that all pressure washing of your Soho porcelain pavers be done with low pressure washer with a maximum of 1600 pst and nothing more powerful. When, pressure washing, care should be taken to prevent damage (adhesive and grout installations). Some re-sanding to joints will be necessary when power washing an installation with sand or polymeric sand joints.

For more information about Boral call us on **1300 134 002** visit our website at **www.boral.com.au/pavers**

Shade variations occur from batch to batch. Colours shown are indicative only and should not be used for final selection. Not all colours are available in every region for each product. See your retailer for colours available in your region. Products ordered should be chosen from actual samples current at the time of order and are subject to availability. Photographs in this brochure are only representative of Boral products and the appearance and effect that may be achieved by their use. Some images are computer generated. Samples, brochures and displays should be viewed as a guide only. Customers should ensure all delivered products are acceptable, and any concerns about products are made prior to laying. © Copyright Boral Hollostone Masonry (South Aust.) Pty Ltd – all rights reserved 2017. Boral, the Boral logo, build something great, boral.com.au and Soho are trademarks or registered trademarks of Boral Masonry Limited. ABN 13 000 223 718 registered trade marks of Boral Limited, Boral Masonry Limited, Boral Hollostone Masonry (South Aust.) Pty Ltd in Australia, other countries, or both. If these and other Boral trade marked terms are marked on their first occurrence in this information with a trade mark symbol (® or ™), these symbols indicate Australian registered or common law trade marks owned by Boral at the time this information was published. Such trade marks may also be registered or common law trade marks in other countries. Other product, company or service names may be trade marks or service marks of others. Boral Hollostone Masonry (South Aust.) Pty Ltd ABN 14 007 604 033. As at June 2017. BCC_14681_06/17