


PREMIER FLOORING™ SELECTION GUIDE

	Type	Solid Overlay Strip Flooring			Solid Structural Strip Flooring				Solid Block Parquetry Flooring			Engineered Hardwood Flooring			
	End Section Size (mm)	80x14	130x14	180x14	63x19	85x19	130x19	180x20.5	65x18 - Standard	85x19 - Jumbo	120x18 - Grande	134x14	186x14	134x14 Parquetry	610x14 Parquetry
Grades	Classic	N	N	N	N	Y		N	Australian Beech, Blackbutt (Coastal), Brushbox, Forest Reds, Ironbark (Grey), Spotted Gum (NSW), Sydney Blue Gum, Stringybark, Tallowwood, Turpentine	Brushbox	Brushbox	N	N	N	N
	Standard & Better	Y	Y	Y	Y	Y	Y	Y	N	Y	Y	Y	Y	Y	Y
		Blackbutt (Coastal), Brushbox, Spotted Gum (NSW), Sydney Blue Gum			Blackbutt (Coastal), Spotted Gum (NSW), Tallowwood	Australian Beech, Blackbutt (Coastal), Blackbutt (New England), Flooded Rose Gum, Forest Reds, Ironbark (Red), Mahogany (Red), Mahogany (White), Spotted Gum (NSW), Spotted Gum (QLD), Stringybark, Turpentine		Blackbutt (Coastal), Brushbox, Ironbark (Grey), Spotted Gum (NSW), Sydney Blue Gum		Blackbutt (Coastal), Spotted Gum (NSW), Sydney Blue Gum	Blackbutt (Coastal), Spotted Gum (NSW), Spotted Gum (QLD), Tallowwood	Blackbutt (Coastal), Spotted Gum (NSW), Sydney Blue Gum	Blackbutt (Coastal), Spotted Gum (NSW), Spotted Gum (NSW), metallon XL™ range	Blackbutt (Coastal), Spotted Gum (NSW)	Blackbutt (Coastal), Spotted Gum (NSW)
	Australia	N	N	N	N	Y		N	N	N	N	N	N	N	N
Natural	Y	Y	Y	Y	Y	Y	Y	Y	N	N	N	N	N	N	
Profile	Tongue & Groove	Y	Y	Y	Y	Y	Y	Y	N	N	N	UNICLIC® System	UNICLIC® System	Y	Y
	End Matched	N	N	N	Y	Y	Y	Y	N	N	N	Y	Y	Y	Y
	Wear Layer Thickness (mm)	6	6	6	7	7	7	7	10	10	10	3.60	3.60	3.60	3.60
	Lengths (m)~	Random 0.9 to 3.6	Random 0.9 to 3.6	Random 0.9 to 3.6	0.9 to 5.7	0.9 to 5.7	0.9 to 5.7	0.9 to 5.7	0.26	0.34	0.60	Up to 1.82	Up to 2.20	0.67	0.61
	Finish	Raw - requires sanding and finishing			Raw - requires sanding and finishing				Raw - requires sanding and finishing			Pre-finished with 35% gloss UV cured acrylic	Pre-finished with brushed matte (10% gloss) UV cured acrylic. Apart from "Copper", stains are also used for the colours in the metallon XL™ range		
Packaging	(lm) per Bundle/ Qty per Box	26.90	13.50	N/A	N/A	N/A	N/A	N/A	80 Blocks	30 Blocks	16 Blocks	9 Boards (3 x Full Length)*	9 Boards (3 x Full Length)*	12 Boards	12 Boards
	(m²) per Bundle/Box	2.15	1.76	N/A	N/A	N/A	N/A	N/A	1.35	0.87	1.15 (Bundle)	1.46	2.46	1.08	0.90
	(lm) per Pack/ (Boxes) per Pallet	753.20	432	330*	680*	500*	300*	240*	40	60	50 (Bundles)	77	55	44	40
	(m²) per Pack/Pallet	60.26	56.16	59.40	42.84	42.50	39.00	43.20	54.08	52.02	57.60	112.65	135.03	47.40	36.00
Install Direct to^	Joists or Battens	N	N	N	Y	Y	Y	Y	N	N	N	N	N	N	N
	Existing Timber Floor	Direct Stick	Direct Stick	Direct Stick	Y	Y	Y	Y	Direct Stick	Direct Stick	Direct Stick	Direct Stick or Floating over Underlay	Direct Stick or Floating over Underlay	Direct Stick	Direct Stick
	Concrete Slab	Direct Stick (Apply moisture barrier first)	N	N	N	N	N	N	Direct Stick (Apply moisture barrier first)	Direct Stick (Apply moisture barrier first)	Direct Stick (Apply moisture barrier first)	Direct Stick or Floating over Underlay	Direct Stick or Floating over Underlay	Direct Stick	Direct Stick
	Plywood/Particleboard Subfloor	Direct Stick	Direct Stick	Direct Stick	Y	Y	Y	Y	Direct Stick	Direct Stick	Direct Stick	Direct Stick or Floating over Underlay	Direct Stick or Floating over Underlay	Direct Stick	Direct Stick
	Min Plywood Thickness (mm)	12	12	12	15	15	15	15 (25 over concrete slab)	12	12	12	12	12	12	12
Acoustic Underlay#	Y	N	N	N	N	N	N	N	N	N	Y	Y	Y	Y	
Nailing Method^	Secret Nail to Joists or Battens	N/A	N/A	N/A	Y	Y	N	N	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Secret Nail to Plywood with Full Trowell Bed of Timber Flooring Adhesive	Y	Y	Y	Y	Y	Y	N (Must still top nail through plywood/particleboard into joists or battens)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Top Nail	N/A	N/A	N/A	Y	Y	Y	Y	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Can be re-sanded and re-coated?	Y			Y				Y			Y Note: Amount of resands of engineered flooring is limited compared with solid hardwood flooring's thicker wear layer. As a stained product, except for "Copper", the metallon XL™ range will revert back to its original Blackbutt colouring when re-sanding.				

- Natural grade Overlay minimum board length is 0.6m. All Sydney Blue Gum is random lengths 0.6m to 2.4m. * is average qty only as packs are supplied in random lengths.
Acoustic underlay can also be incorporated under plywood when installing Parquetry or any Solid Strip Flooring that is wider than 80mm. The acoustic underlay manufacturer's guidelines must be adhered to.

^ For further detail on installation and fixing methods, please refer to the relevant Boral Flooring Installation Guide.
*Up to six short boards per pack. Aftercare: Please refer to Boral's Timber Flooring Care and Maintenance guide. All products offered are subject to availability.

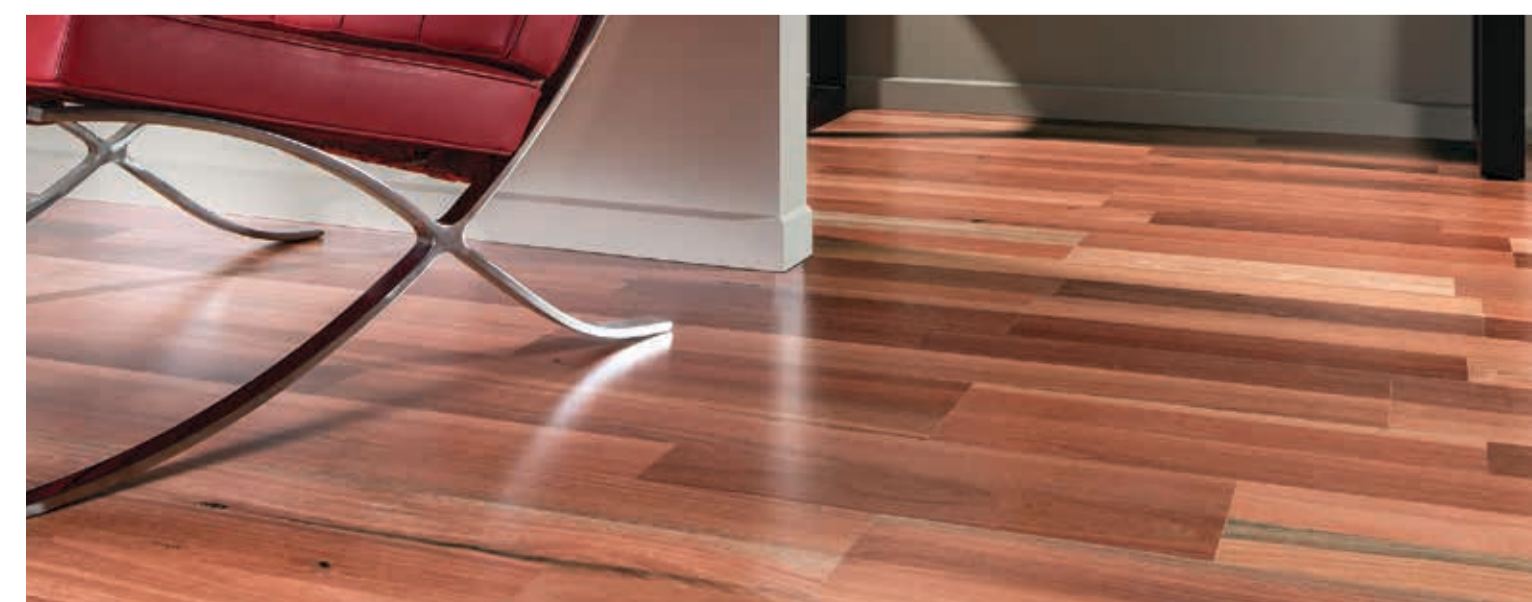

BORAL®