Pollution Incident Response Management Plan BERRIMA CEMENT

Version Eight: 20/04/2020

DOCUMENT CONTROL SHEET

Rev.	Date	Prepared by	Approved By	Revision Details
01	December 2012			
02	24 January 2013			
2.1	September 2013			
03	September 2014			
04	September 2015			
05	March 2017			
06	March 2018			
07	March 2019			
08	April 2020			

Current Rev.	Date Implemented	PIRMP Test Schedule	Date for Next Review
12	29/4/2020	12 months	20/3/2020

TABLE OF CONTENTS

1.	PURPOS	E	4
2.	LEGISLA	TIVE REQUIREMENTS	4
3.	DEFINIT	ION OF A POLLUTION EVENT	4
4.	SCOPE		5
5.	POTENT	TAL POLLUTING SUBSTANCES	6
6.	ROLES A	ND RESPONSIBILITIES	15
7.	INTERNA	AL POLLUTION INCIDENT REPORTING	16
8.	EXTERN	AL POLLUTION INCIDENT REPORTING	17
9.	POLLUT	ION INCIDENT AUTHORITY CONTACT LIST	18
10.	INCIDEN	IT RESPONSE TRAINING	14
11.	PIRMP A	AUDIT	22
12.	PIRMP F	REVIEW	22
	12.1	EVENT BASED	23
	12.2	TIME BASED	23
APPE	NDIX 1: R	ISK ASSESSMENT ON POTENTIAL IMPACTS	
APPE	NDIX 2: P	IRMP RESPONSE ACTIONS	
APPE	NDIX 3: B	ERRIMA CEMENT SPILL KIT LOCATIONS MAP	
APPE	NDIX 4: B	ERRIMA CEMENT LOCATION MAP	
APPE	NDIX 5: B	ERRIMA CEMENT REFERENCE MAP	
APPE	NDIX 6: B	ERRIMA CEMENT AFFECTED AREA MAP	
APPE	NDIX 7: P	OLLUTION INCIDENT NOTIFICATION LOG	
APPE	NDIX 8: II	MMEDIATE REPORTING CONTACT SHEET	

1. PURPOSE

The purpose of the Berrima Cement Pollution Incident Response Plan is to:

- Provide direction to the staff at Berrima Cement in responding to pollution incidents at the Berrima Cement Works;
- Ensure timely communication about a pollution incident is provided to staff at the premises, the Environment Protection Authority (EPA), other relevant authorities specified in the Protection of the Environment Legislation Amendment Act (POELA Act) (including Wollondilly Council, NSW Ministry of Health, Work Cover NSW, and Fire and Rescue NSW) and persons outside the operations who may be affected by the impacts of a pollution incident;
- Minimise and control the risk of a pollution incident at Berrima Cement by identifying key risks and planned actions to minimise and manage those risks;
- Detail the training requirements for this plan, identifying persons responsible for implementing it, and ensuring that the plan is regularly tested for accuracy, currency and suitability.

2. LEGISLATIVE REQUIREMENTS

The specific requirements for a PIRMP are set out in Part 5.7A of the POEO Act and the Protection of the Environment Operations (General) Regulation 2009 (POEO(G) Regulation). In summary, this provision requires the following:

• All holders of environment protection licences must prepare a pollution incident response management plan (section 153A, POEO Act).

- The plan must include the information detailed in the POEO Act (section 153C) and be in the form required by the POEO(G) Regulation (clause 98B).
- Licensees must keep the plan at the premises to which the environment protection licence relates (section 153D, POEO Act).
- Licensees must test the plan in accordance with the POEO(G) Regulation (clause 98E).
- if a pollution incident occurs in the course of an activity so that material harm to the environment is caused or threatened, licensees must immediately implement the plan (section 153F, POEO Act)

3. DEFINITION OF 'POLLUTION INCIDENT'

The definition of a pollution incident is:

"pollution incident means an incident or set of circumstances during or as a consequence of which there is or is likely to be a leak, spill or other escape or deposit of a substance, as a result of which pollution has occurred, is occurring or is likely to occur. It includes an incident or set of circumstances in which a substance has been placed or disposed of on premises, but it does not include an incident or set of circumstances involving only the emission of any noise."

A pollution incident is required to be notified if there is a risk of 'material harm to the environment', which is defined in section 147 of the POEO Act as:

- a) harm to the environment is material if:
 - i. it involves actual or potential harm to the health or safety of human beings or to ecosystems that is not trivial, or

ii. it results in actual or potential loss or property damage of an amount, or amounts in aggregate, exceeding \$10,000 (or such other amount as is prescribed by the regulations), and

b) loss includes the reasonable costs and expenses that would be incurred in taking all reasonable and practicable measures to prevent, mitigate or make good harm to the environment.

Berrima Cement is now required to report pollution incidents immediately to the EPA, NSW Health, Fire and Rescue NSW, WorkCover NSW and the local council.

4. SCOPE

This PIRMP must be followed by employees, contractors and visitors of Berrima Cement, to assist in the early response to and reporting of a pollution incident.

5. POTENTIAL POLLUTING SUBSTANCES

The main hazards to human health and the environment at Berima Cement are included in the following table.

Site: Berrima Last updated: Nov 2012

Product/ Chemical Name	Maximum Quantity Stored	Location where the Product is Stored/Used	Storage Type	Is the Chemical a Dangerous Good? (Y/N)	Is the Chemical a Hazardous Substance? (Y/N)
Kiln Fuel – Diesel	55000L	Tank No. SS60	Tank	N	Y
Kiln Fuel – Diesel	55000L	Tank No. SS61	Tank	N	Y
Diesel	60000L	AKF1 - SS63	Tank	N	Y
Diesel	22000L	AKF1 - SS64	Tank	N	Υ
Diesel Fuel	25000L	Tank No. SS70	Tank	N	Y
Diesel Fuel	25000L	Tank No. SS71	Tank	N	Υ
LPG	2500L	Depot 2	Tank	Y	Y
LPG	4500KG	Depot 2	Tank	Y	Y
Acetylene	1000KG	Gas Store	Bottles	Y	Y
Oxygen	2500KG	Gas Store	Bottles	Y	Y
Hydrogen	250KG	Gas Store	Gas bottles	Y	Y
LPG	330KG	Gas Store	Gas bottles	Y	Y
Hydrochloric Acid (30%)	30L	Laboratory	Bottles	Y	Y

Berrima Cement – PIRMP-V8 7 of 44

	1	1	1		
Ethanol	100L	Laboratory	Bottles	Υ	Υ
Methanol	100L	Laboratory	Bottles	Y	Y
Kerosene	10L	Laboratory	Bottles	Υ	Υ
Acetone	20L	Laboratory	Bottles	Y	Y
Grinding Aid	5000L	Cement Mill 6	Tank	N	Y
Grinding Aid	5000L	Cement Mill 7	Tank	N	Υ
Hydrochloric Acid (30%)	1000L	Powerhouse pond	Tank	Y	Y
Hydrochloric Acid (30%)	1000L	Hotwells	Tank	Y	Y
CALTEX DELO 400 SAE 15W/40	410L	Loco Shed	Drum	N	N
CALTEX RANDO HD 68	410L	Loco Shed	Drum	N	N
CALTEX 85W-140 Gear Oil	205L	Loco Shed	Drum	N	N
CALTEX 80W-90 Gear Oil	205L	Loco Shed	Drum	N	Υ
Caltex Safe Degrease	205L	Loco Shed	Drum	Υ	Υ
Waste Oil	1000L	Loco Shed	ISO Container	Υ	Υ
CALTEX DELO 50/50 Coolant	205L	Loco Shed	Drum	N	Y
Hydrogen	156KG	Preheater L6	Bottles	Y	Y
CALTEX DELO GREASE EP 2	40KG	OIL STORE	Drum	N	N

Berrima Cement – PIRMP-V8 8 of 44

CALTEX EP GREASE C 3	40KG	OIL STORE	Drum	N	N
CALTEX MINE GREASE PREMIUM 2	180KG	OIL STORE	Drum	N	N
CALTEX RANDO HD 32	205L	OIL STORE	Drum	N	N
CALTEX TEXTRAN TDH PREMIUM	205L	OIL STORE	Drum	N	N
CALTEX MEROPA 320	205L	OIL STORE	Drum	N	N
CALTEX TRANSFORMER OIL BSI INHBITED	205L	OIL STORE	Drum	N	N
CALTEX DELO 400 SAE 15W/40	205L	OIL STORE	Drum	N	N
CALTEX TORQUE FLUID 434	205L	OIL STORE	Drum	N	N
CALTEX MEROPA 460	205L	OIL STORE	Drum	N	N
CALTEX RANDO HD 32	205L	OIL STORE	Drum	N	N
CALTEX RANDO HD 68	205L	OIL STORE	Drum	N	N
CALTEX RANDO HD 150	205L	OIL STORE	Drum	N	N
CALTEX MEROPA 320	205L	OIL STORE	Drum	N	N
CALTEX MEROPA SYNTHETIC EP 320	205L	OIL STORE	Drum	N	N
CALTEX TEXAMATIC 1888	205	OIL STORE	Drum	N	N
CALTEX SAFE-D-GREASE QB	205L	OIL STORE	Drum	N	Y
CALTEX KEROSENE	200L	OIL STORE	Drum	Υ	Y

9 of 44

CALTEX HAVOLINE FULLY SYNTHETIC 5W/40	205L	OIL STORE	Drum	N	N
Transformer Oils – Refer to Transformer Register	765 to 7400L	Various	Transformers	Various	Various

Site Name: Berrima Cement						Responsible Person: Operations Manger	Date: 23/04/2020
Name / description	Covered under Haz Chemicals/MSDS?	Amount stored	Location of storage	Map reference	Need for early warning ¹	Current controls	See Risk Ass & PIRMP Response Action (see Below)
CHEMICALS/FU	ELS/LUBRICANTS (raw n	naterials and	products which	can cause po	llution)		
Diesel	Class 3	Listed above	Diesel Storage Area	Ref No #1	N/A	 Bunding PMP Training Spill Kits SOP Inductions Fire Fighting Equipment Security 	Incident #1-2
Grinding aid	Class 3	10 000ltrs	Cement Mil 6 Cement Mill 7	Ref No #3	N/A	 Bunding PMP Training Spill Kits SOP Inductions Fire Fighting Equipment Security 	As Per Incident #1
Oils/Solvents	Class 3	Packaged goods up to 600ltrs	Oil Store /Loco Shed	Ref No #2	N/A	 Bunding PMP Training Flammable Cabinet Spill Kits 	Incident #4

¹ Early warnings relate to informing neighbours who may be affected by the emission of this substance. If this substance is of a type and quantity which may reach neighbours then early warning assessment of actions is required to be undertaken.

Lubricants, Gases	Class 2	Variable	Maintenance Workshop	Ref No [#] 2	N/A	 Inductions Fire Fighting Equipment Security Fire Extinguishers Concrete Floor Enclosed Shed Containment Cages and Cabinets 	Incident #4
Oils/Fuel	Class 3	Variable	Plant and Equipment (Workshop area)	Ref No #2	N/A	 PMP Training Spill Kits SOP Inductions Fire Fighting Equipment Security 	Incident #4
Acids	Class 8	2000ltrs	Powerhouse Ponds Hotwells		N/A	TrainingSpill kitsBunded	
Laboratory Chemicals	As per individual SDS	Variable <500Ltrs	Laboratory	Ref #10		 Fire Extinguishers Concrete Floor Enclosed Shed Containment Cages and Cabinets Security 	
	ockpiles, silos, bulk so	olids etc)			_		
Product Stockpiles	N/A ns, wastewater tanks	Up to 250000T	Dedicated on site	Ref No #8 & #9	N/A	 Water sprays Water Cart Maintain manageable levels Security 	Incident #5

Water Storage Dam (Sediment)	N/A	Variable		Ref No #6	N/A	 Continue to use for dust suppression Ensure pumps are maintained through scheduled maintenance Discharge monitoring 	Incident #6
Storm Water Drains SUBSTANCES IN PR	N/A ROCESSES (substance	Variable	Site be emitted fro	N/A m operational	N/A process i.e. trea	Straw Bales Rubber and Earthen Berms Audits and Inspections atment plants, vehicles etc)	Incident #6
Name /	Covered under	Amount	Location of	Map	Need for	Current controls	See Risk Ass & PIRMP
description	Haz Chemicals/MSDS?	stored	storage	reference	early warning ²		Response Action (see Below)
Mobile Plant (onsite) BORAL	Class 3	Up to 20 MP on site	Dedicated on site	N/A	N/A	Spill KitsPre start checksPMPTraining	Incident #7
Car Parking up to 100 vehicles	Class 3	Variable	Car Park	Ref No #4	N/A	Spill KitsTraining	Incident #9
Traffic Areas (dust, chem. leaks & loss	Class 3	N/A	Dedicated on site	N/A	N/A	TrainingWater cartSpill Kits	Incident #10

² Early warnings relate to informing neighbours who may be affected by the emission of this substance. If this substance is of a type and quantity which may reach neighbours then early warning assessment of actions is required to be undertaken.

6. ROLES AND RESPONSIBILITIES

Position	Responsibility
Employees and Contractors	Following the procedures outlined in the PIRMP and related documents Immediately alerting Supervisor or Team Leader of any environmental incidents or near-misses.
Team Leaders / Front Line Supervisors	Following the procedures outlined in the PIRMP and related documents Immediately alerting Site/Production Manager or, in case of their unavailability, Environmental Representative or Environment Manager of any potentially material environmental incidents or near-misses. Conducting incident investigations.
Site / Operations Manager and/or Site Environmental Business Partner and/or Environment Manager	Authorisation of the PIRMP Administration, maintenance and implementation of the PIRMP Assessing whether the incident has caused or threatens "material environmental harm" and, if so, immediately notifying all Appropriate Regulatory Authorities. Ensuring that investigations are undertaken to a level corresponding to the level of risk and impact.

7. INTERNAL POLLUTION INCIDENT REPORTING

Any pollution incident satisfying the *material harm* threshold must be immediately reported to relevant statutory authorities by either the Site/Operations Manager, or Environment Manager.

In cases where material harm level cannot be immediately assessed or insufficient information comes to hand on the severity of the incident, the general advice is to err on the side of caution and notify the Relevant Authorities with a qualification that the situation could not yet be fully assessed.

Until further notice the following procedure needs to be followed:

- 1. When a pollution incident occurs, a person who has become aware of it must immediately bring it to the attention of his/her immediate Supervisor or Manager
- 2. If necessary, first ring 000 for Emergency Services
- 3 At least one of the following Boral Cement personnel must be contacted **immediately**:

Name	Function	Phone number	Mobile number
	Operations Manager		
	Technical Manger		
	Production Manager		
	Environmental Business Partner		
	Environment Manager – NSW/ACT		

- 5. In borderline situations, where the exceedance of the trigger level of "material harm" of a pollution incident may not be clear, a quick assessment including consultation with Boral environmental personnel should be undertaken to help the decision whether to notify or not.

6. Boral's Senior Management must be informed promptly of the fact of immediate notification to the Authorities. This includes environmental personnel listed above, as well as

8. EXTERNAL POLLUTION INCIDENT REPORTING

As the legislation requires that notification must be done immediately upon becoming aware of the pollution incident, it is unlikely that a detailed picture will be available for reporting. Notwithstanding, is seems that some of the Government Authorities prepared a detailed questionnaire which is being filled at the time of this initial notification. Under the stress of incident handling it could be easy to provide a hasty, inaccurate estimate of the situation when answering these questions.

Therefore, the notification should be restricted to the facts known and nothing should be assumed or guessed. The details will be provided to the asking Authority later when more information comes to hand.

The initial notification should include as much of the following information (if known) as possible:

- location and time of the pollution incident
- type of the incident (spill, fire, unlicensed harmful discharge, etc)
- assessed level of incident gravity: "it seems to be..." (e.g. "a relatively minor spill"; "major fire", "explosion limited to one building", etc.)
- whether the Emergency Services have been required to attend.

Unless known for a fact, the answers to other questions should be politely deferred until a better assessment of the situation can be made.

The Boral person who is responsible for notifying the Authorities (Site/Operations Manager or Environment Manager) about the incident must prepare a Notification Log (a suitable form is attached) with the details of time of notifications and the persons who took to the call. The Berrima Cement—PIRMP-V8

Authorities are expected to log the calls but early indications are that this is not always the case.

Notification of all Appropriate Government Authorities (at least 5 entities) may take considerable time. Delays may be experienced connecting to the right person or no contact may be possible after hours. All such instances should be recorded in the Notification Log.

9. POLLUTION INCIDENT AUTHORITY CONTACT LIST

Government Authority - compulsory notifications	Emergency notification phone number
EPA – Environment Line	131 555
Fire & Rescue NSW (FRNSW)	1300 729 579
Wingecarribee Council	(02) 4868 0888
Public Health Unit (Southern Sydney) – Liverpool GW PHU	HealthLink (24 hr)- 1300 066 055 Head Office- Liverpool- (02) 9794 0855
WorkCover Authority of NSW	131050 Company ABN asked: 62 008 528 523
Government Authority - ring if relevant	Emergency notification phone number
Police & Ambulance	000
Roads and Maritime Services (road spills)	132 701
NSW Office of Water	02 8838 7885
Bush Fire Control Officer	02 4677 7000
Poisons Information Centre	131 126
Endeavour Energy (power line emergencies)	131 003
Rarrima Camant - DIRMP-V8	

Communication with the local community may also be undertaken depending on the circumstances of the pollution incident. Berrima Cement would consider the following options for providing Early Warning and ongoing information to the community on pollution incidents:

- Direct phone contact with any local residents directly impacted by the pollution incident
- Letter Box drops of incident information and site contacts to local residents impacted by the pollution incident
- The inclusion of incident details within the relevant Community Newsletter

The Stakeholder Relations Manager may be used to assist in the process of communicating with the community.



I	I	I	I
	I		grace.gwen@bigpond.com
	I		I
	I		
	I		
	I		
	I		naomori77@yahoo.com.au
	I		mandy@ecclestonbooks.com.au
	I		I
	I		Renata.kaegi@bigpond.com; vwlion@bigpond.com
	I		spuppet@ozemail.com.au
	I		Janecotter2951@gmail.com; michaelcotter@gmail.com
	I		I
	I		I
	I		I
	I		narnull@bigpond.net.au
I	I	I	I
			peter.rose@dasman.com.au
			rbunker21@gmail.com
	I		I

			seedconferencelady@hotmail.com
			thwestco@bigpond.com
	F		thecroft93@bigpond.com
			patri2@acenet.com.au
	I		I
	I		I
	I	I	joshua.cook@railcorp.nsw.gov.au
	I		kathyfleming@hotmail.com
	I	I	warren.hardy@gmail.com
I	I	I	I
I			I
	I		I
	I		Jim.Clark@wsc.nsw.gov.au
I			I
	I		fimf@magtech.com.au

10. INCIDENT RESPONSE TRAINING

Berrima Cement will implement the Pollution Incident Response Management Plan by training or providing information to relevant employees and contractors in relevant areas of the Plan.

Training or information will be provided on the following;

- The contents and intent of this PIRMP,
- The roles and responsibilities of site staff in relation to this PIRMP
- Spill response procedures;
- General environmental awareness; and / or
- Hazardous materials awareness.

11. PIRMP AUDIT

The objectives of an audit are to maintain compliance with this plan. Internal audits of this Plan will be undertaken every 3 years.

Routine testing of the plan will be conducted annually, and can be completed through the following methods:

- Simulated environmental emergency, or
- Desktop simulations.

12. PIRMP REVIEW

Revisions are to be coordinated by the Site Manager and Environmental Representative.

The objectives of a review are:

- To maintain compliance with the statutory requirements, and
- To identify opportunities for improvement in the Plan, and reduce the risk to human health and the environment

12.1. EVENT BASED

Events which may trigger a review of this Plan or its associated documents include:

- Within 1 month of reporting to the nominated parties in accordance with the plan, after a pollution incident, or
- Modification/Improvement to the system

12.2. TIME BASED

Berrima Cement will review this management plan routinely every 12 months. The Plan review will include:

- This Document, and
- Legislation, Approval and Licence changes.

APPENDIX 1.

RISK ASSESSMENT on POTENTIAL IMPACTS

	-	Hazard	and Lil	kelihod	od Risk Ass	sessment and Corrective Control Measures		
Site:	Site:					Person: Reviewed Date:	Reviewed Date:	
Berrima C	ement			Qua	arry Mana	ger/Supervisor 20 April 2020		
Name / ref of pollutant/ chemicals	Description of Hazard / Incident leading to hazard	Conseq uence	Likely hood	Risk	Impact on neighbours ³	Control Measures Corrective Action Coverage under other Plans	Responsible person	Action date
Diesel	Incident #1 Catastrophic failure of one/both above ground tanks	2	1	L	N/A	Consequence: (minor): Failure resulting in loss of all or substantial volume of tanks would be captured entirely by existing primary bund with no release to soil or water. Likelihood: (unlikely): Tanks is stored in a bunded area. Due to location of tank damage to tanks is unlikely to occur from external equipment. In addition tanks are maintained in good structural integrity with low risk of failure through corrosion.	As per PIRMP action plan	When required
	Incident #2 Loss of diesel outside bund during refuelling/fuelling operations.	2	2	L	N/A	Consequence: (minor): Failure resulting in loss/leakage from fuelling or refuelling from hose, nozzle or plant/equipment would be captured by a self bunded fill point or spill kill with minimal release to soil. Likelihood: (unlikely): Due to location within the tank structure an incident while re-fuelling and fuelling is likely to occur on some occasions. Hoses and refuelling equipment are maintained with low risk of failure.	As per PIRMP action plan	When required

³ If the incident may impact on neighbours then it will need to trigger the early warnings assessment and actions

Oils/Solvents	Incident #4 Loss of oils solvents inside bund during	1	2	L	N/A	Consequence: (incidental): Failure resulting in loss of oils/solvents from packaged goods would be captured entirely by existing primary bund with no release to soil or water.	As per PIRMP action plan	When required
	delivery and or use					Likelihood: (unlikely): Due to location within the bund, spillage during delivery and use is unlikely to occur. In addition hoses and decanting equipment are maintained in good structural integrity with low risk of failure.	detion plan	
Product stockpiles	Incident #5. Excessive airbourne dust from stockpiled material	1	2	L	Y	Consequence: (incidental): Excessive dust from stockpile during high winds causing nuisance to surrounding area. Likelihood: (unlikely): Stockpiles are maintained to a manageable level on a monthly basis. Use of water sprinklers and water cart onsite during windy	As per PIRMP action plan	When required
Sediment Dams	Incident #6 Catastrophic failure of one or more sediment dams releasing large volumes of water into on-site and off- site water courses (i.e creek).	1	2	L	N/A	periods. Consequence: (incidental): Catastrophic failure of one or more sediment dams are likely to result in off-site impacts to water courses which would predominantly reduce water quality over a short period of time. As such, impact to the environment/human health is not considered to be significant. Likelihood: (unlikely): Dams are frequently monitored and inspected for levels and integrity. Note: For PIRMP purposes overflow events during extreme wet weather will be reported under POEO Licence obligations and not Immediate Reporting.	As per PIRMP action plan	When required
Mobile Plant	Incident #7 Mobile plant, hydraulic hose or fuel tank failure	1	2	L	N	Consequence: (incidental): Failure from fuel tank or hydraulic hoses would be maintain to a small localised area on site. Likelihood: (unlikely): Electrostatic Precipitator Trip likelihood Hose or fuel tank failure from mobile plant would be minimal as prestart and regular maintenance programs are in place to capture and prevent such occurrences. Spills kits also maintain and available in various areas.	As per PIRMP action plan	When required
Electrostatic Precipitator Trip	Incident #8 Electrostatic Precipitator trip leading to emmisions that exceed site 24hr limits	2	2	L	N	Consequence: (minorl): Localised impact regulatory consequence managed with 24hr limits Likelihood: (unlikely): Electrostatic Precipitator Trip is unlikely due to regular maintenance and calibration, on most occasion the system resets with no extended trips. Alarms are set up to indicate trip in the site control room which is monitored 24hr a day. Control room staff are trained in procedures for alarms	As per PIRMP action plan	When required

Berrima Cement – PIRMP-V8 25 of 44

Car Park	Incident #9 Ruptured fuel tank	1	2	L	N	Consequence: (incidental): Failure from fuel tank or hydraulic hoses would be maintain to a small localised area on site. Likelihood: (unlikely): Hose or fuel tank failure from employee or visitor car would be minimal. Car park area is fully sealed. Spill kits also maintain and	As per PIRMP action plan	When required
						available in various areas		
Traffic areas (dust)	Incident # 10 Surface dust from Fixed plant	1	2	L	Y	Consequence: (incidental): Dust created from fixed plant operations across site	As per PIRMP action plan	When required
	·					Likelihood: (unlikely): Maintenance of fixed plant through maximo (maintenance system) along with real time monitors reduces the likelihood.	•	

Berrima Cement – PIRMP-V8 26 of 44

APPENDIX 2.

PIRMP RESPONSE ACTIONS

Incident No 1

Incident #1	Catastrophic failure of one/both diesel tanks.
	Actions Required:
	Contact all relevant people/department (refer to Immediate Reporting Contact Sheet)
	Ensure bunds are capturing full volume of diesel
	Ensure bund integrity is sound throughout the entire period of incident (i.e. periodic inspections)
	Contact service provider (
	Area to be restricted to Incident Response Personnel
	Ensure spill kit available for any release from bund
	If any release from bund onto unsealed soil/surface water - Environmental Consultants to be engaged to investigate and remediate contamination.
	Repair/replace tanks
	Refuel tanks
	Inspect bund for ongoing serviceability
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	Operations Manager
Controller	Call service provider (Supervisor)
	Spill Kit manager (Supervisor)
	Periodic inspections and update reporting of site and bund (Supervisor)
Scale of incident	Incident would be restricted to Diesel storage area with minimal external impact, however, potential for bund overflow or failure may result in soil and surface water contamination that will require specialist investigation/remediation.
Evacuate	Only if fire or explosion potential exists. Operations Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
	Operations Manager
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used

Berrima Cement – PIRMP-V8 27 of 44

	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
respondent +	
safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Service Provider to dispose of diesel and advise on required clean-up.
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #2	Loss of Fuel due to filling and refueling from one/both diesel tanks.
	Actions Required:
	Contact all relevant people/department (refer to Immediate Reporting Contact Sheet)
	Ensure bunds are capturing full volume of diesel
	Ensure bund integrity is sound throughout the entire period of incident (i.e. periodic inspections)
	Contact service (to pump-out bund contents
	Area to be restricted to Incident Response Personnel
	Ensure spill kit available for any release from bund
	 If any release from bund onto unsealed soil/surface water - Environmental Consultants to be engaged to investigate and remediate contamination.
	Repair/replace tanks
	Refuel tanks
	Inspect bund for ongoing serviceability
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	Supervisor
Controller	Call service provider (Supervisor)
	Spill Kit manager (Supervisor)
	Periodic inspections and update reporting of site and bund (Supervisor)
Scale of incident	Incident would be restricted to Diesel storage area with minimal external impact. However, potential for bund overflow or failure may result
	in soil and surface water contamination that will require specialist investigation/remediation.
Evacuate	Only if fire or explosion potential exists. Quarry Manager and any advice provided by Fire Dept as part of attendance after immediate
	notification.

Berrima Cement – PIRMP-V8 28 of 44

Communications	Internal:
	Operations Manager
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
respondent +	
safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Service Provider to dispose of diesel and advise on required clean-up.
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #4	Loss off oil/solvents, packaged goods.
	Actions Required:
	 Contact all relevant people/department (refer to Immediate Reporting Contact Sheet)
	Ensure bunds are capturing full volume of oil/solvents
	 Ensure bund integrity is sound throughout the entire period of incident (i.e. periodic inspections)
	Contact service provider (to pump-out bund contents
	Area to be restricted to Incident Response Personnel
	Ensure spill kit available for any release from bund
	If any release from bund onto unsealed soil/surface water - Environmental Consultants to be engaged to investigate and remediate
	contamination.
	Inspect bund for ongoing serviceability
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	Supervisor
Controller	Call service provider (Supervisor)
	Spill Kit manager (Supervisor)
	 Periodic inspections and update reporting of site and bund (Supervisor)

Scale of incident	Incident would be restricted to chemical storage area with minimal external impact. However, potential for bund overflow or failure may
Scale of incluent	result in soil and surface water contamination that will require specialist investigation/remediation.
Evacuate	Only if fire or explosion potential exists. Quarry Manager and any advice provided by Fire Dept as part of attendance after immediate
	notification.
Communications	Internal:
	Supervisor
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
respondent +	
safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Service Provider to dispose of diesel, oil, grease and advise on required clean-up.
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #5	Excessive airborne dust from stockpiled material. Actions Required: • Employees, Contractor/Visitor to notify site representative of issue immediately. (induction) • Daily monitoring to be undertaken to assess weather and site conditions • Contact all relevant people/department (refer to Immediate Reporting Contact Sheet) • Dust suppression activity to commence immediately on stockpiles
Alarm raising	 Review Dust TARP foe site and follow actions as required by the trigger level, based on weather conditions. Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency Controller	 Supervisor Call service provider (Supervisor) Spill Kit manager (Supervisor)

	Periodic inspections and update reporting of site and bund (Supervisor)
Scale of incident	Incident would be localised to the area surrounding stockpile area, with minimal external impact.
Evacuate	Only if fire or explosion potential exists. Quarry Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
Rescuer / respondent + safety checks	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Rescue + First Aid	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Clean up and Waste disposal	Service Provider to dispose of diesel and advise on required clean-up.
Reporting and re-preparedness	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)

Incident *6	Failure of one or more sediment dams. Actions Required: Contact all relevant people/department (refer to Immediate Reporting Contact Sheet) Ensure bund integrity is sound throughout the entire period of incident (i.e. periodic inspections) Contact local neighbours if going to be in inundated by rise of water Area to be restricted to Incident Response Personnel
	 If any release from site onto unsealed soil/surface water - Environmental Consultants to be engaged to investigate and remediate contamination if any Contact local contractor to rebuild dams immediately
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.

Emergency	Quarry Supervisor
Controller	Call service provider (Supervisor)
	Spill Kit manager (Supervisor)
	Periodic inspections and update reporting of site and bund (Supervisor)
Scale of incident	Catastrophic failure of one or more sediment dams are likely to result in off-site impacts to water courses which would predominantly
	reduce water quality over a short period of time. As such, impact to the environment/human health is not considered to be significant.
Evacuate	Only if flood potential exists. Quarry Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
	Quarry Manager
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
respondent +	
safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Consultants to be contacted to advise on required clean-up.
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #7	Mobile plant, hydraulic hose or fuel tank failure.
	Actions Required:
	 Contact all relevant people/department (refer to Immediate Reporting Contact Sheet)
	Area to be restricted to Incident Response Personnel
	Ensure spill kit available for any release from mobile plant & equipment
	 Used spill kit absorbent pads to be stored in designated spill bags for correct disposal
	 If any release from mobile plant onto unsealed soil/surface water is investigated and remediated immediately

	Call service provider to inspect plant & equipment for serviceability
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	Supervisor
Controller	Call service provider (Supervisor)
	Spill Kit manager (Supervisor)
	Periodic inspections and update reporting of site and bund (Quarry Supervisor)
Scale of incident	Incident would be localised to the area with no external impact.
Evacuate	Only if fire or explosion potential exists. Environmental Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
	Operations Manager
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
respondent +	
safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Service Provider to dispose of diesel and advise on required clean-up.
Waste disposal	
Reporting and	Incident Notification SOP (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #8	Electrostatic Precipitator Trip Actions Required: Restart precipitator If does not want to restart keep raw mill #6 feed off Control Room to notify Production Manager or Technical Manager Monitor real time information to assess if 24 limit will be exceeded Shut down kiln Contact all relevant people/department (refer to Immediate Reporting Contact Sheet) Contact maintenance team for assessment If any release from stacks will affect near neighbors site PIRMP is to be followed Call service provider to inspect real time monitor & equipment for serviceability if required
Alarm raising	Site Management to contact environment manager to assess the need for regulatory notification, and PIRMP actions to be implemented.
Emergency Controller	 Control room Supervisor Notify Technical Manager Notify Site Operations Manager Track 24hr emissions graph
Scale of incident	Incident would be likely be localised to the area with no external impact, potential for incident on a large scale with external impact is unlikely but possible.
Evacuate	Only if emissions impact exists. Site Manager and any advice by safety team will determine necessity.
Communications	Internal: Operations Manager Enviro Representative External mandatory: Immediate Reporting Contact Sheet to be used Environmental Manager will assess need for regulatory reporting External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan and PIRMP
respondent +	
safety checks	

Rescue + First	As per Site Emergency Plan or Fire Department as PIRMP Reporting
Aid	
Clean up and	N/A.
Waste disposal	
Reporting and	Incident Notification SOP (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #9	Car Park/ fuel tank failure.
	Actions Required:
	 Contractor/Visitor/Employee to notify site representative of issue immediately. (induction)
	Area to be restricted to Incident Response Personnel
	Ensure spill kit available for control of pollutants
	If any release from mobile plant onto unsealed soil/surface water is investigated and remediated immediately
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	Supervisor
Controller	Spill Kit manager (Supervisor)
Scale of incident	Incident would be localised to the area with no external impact.
Evacuate	Only if fire or explosion potential exists. Operations Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
	Operations Manager
	Enviro Representative
	External mandatory:
	Immediate Reporting Contact Sheet to be used
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting

Berrima Cement – PIRMP-V8 35 of 44


respondent + safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	Service Provider to dispose of contaminate
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

Incident #10	Dust from traffic areas.
	Actions Required:
	 Employees, Contractor/Visitor to notify site representative of issue immediately. (induction)
	 Daily monitoring to be undertaken to capture whether and site conditions as per site Dust TARP.
	 Contact all relevant people/department (refer to Immediate Reporting Contact Sheet)
	Dust suppression activity to commence immediately on unsealed roads & dusty areas of site
Alarm raising	Any personnel involved or witnessing incident to report to immediate supervisor and PIRMP actions to be implemented.
Emergency	
Controller	• Supervisor
	Supervisor or Team Leader to instruct site personnel
Scale of incident	Incident would be localised to the area with minimal external impact.
Evacuate	Only if fire or potential exists. Plant Manager and any advice provided by Fire Dept as part of attendance after immediate notification.
Communications	Internal:
	Operations Manager
	External mandatory:
	Immediate Reporting Contact Sheet to be used if required
	External non-mandatory: N/A
Rescuer /	As per Site Emergency Plan or Fire Department as part of Immediate Reporting

respondent + safety checks	
Rescue + First	As per Site Emergency Plan or Fire Department as part of Immediate Reporting
Aid	
Clean up and	N/A
Waste disposal	
Reporting and	Incident Notification (GRP-HSEQ-3-02 Incident Reporting Investigation and Action Management)
re-preparedness	

APPENDIX 3.


BERRIMA CEMENT SPILL KIT LOCATIONS

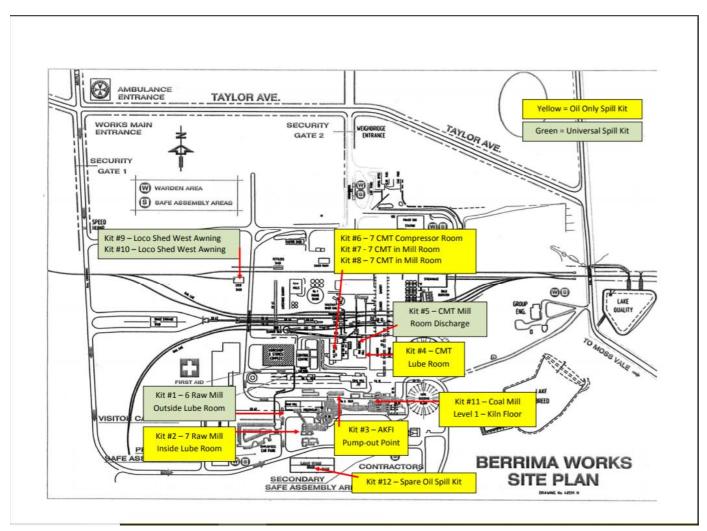

Berrima Cement – PIRMP-V8 38 of 44


APPENDIX 4.

BERRIMA CEMENT LOCATION MAP

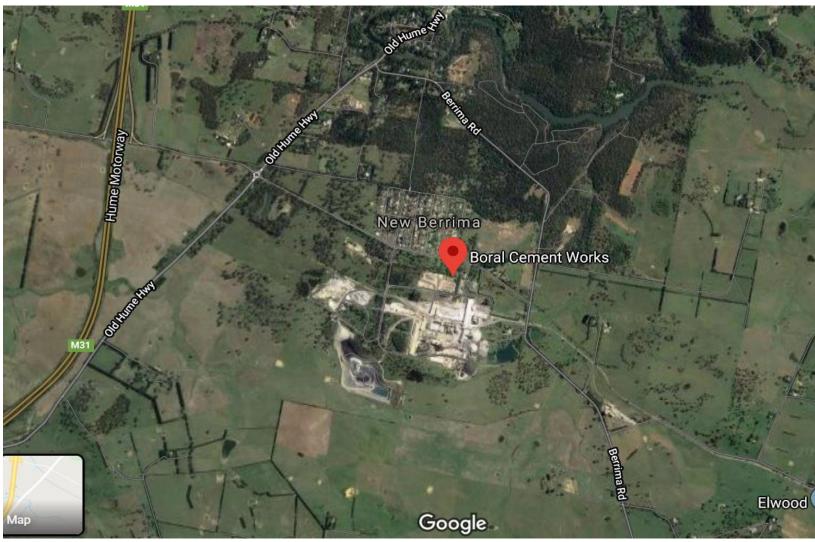

APPENDIX 5.


BERRIMA CEMENT REFERENCE MAP

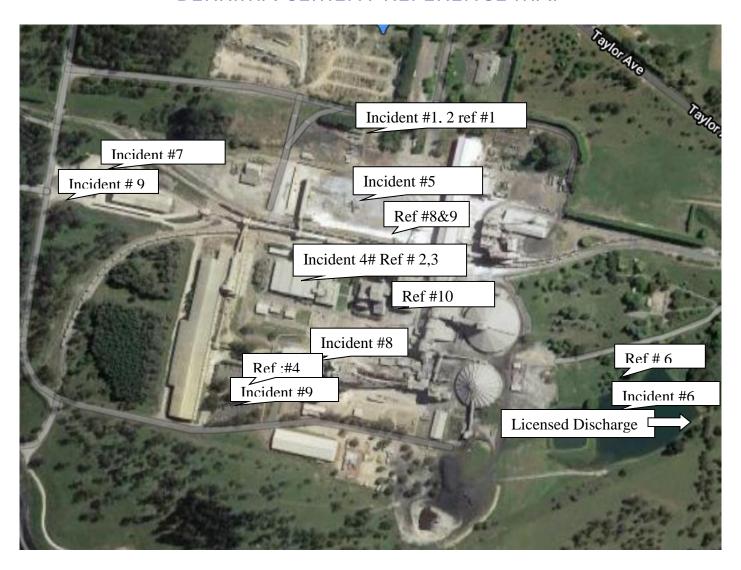

Berrima Cement– PIRMP-V8 40 of 44

APPENDIX 6.

BERRIMA CEMENT- MAP OF AFFECTED AREAS

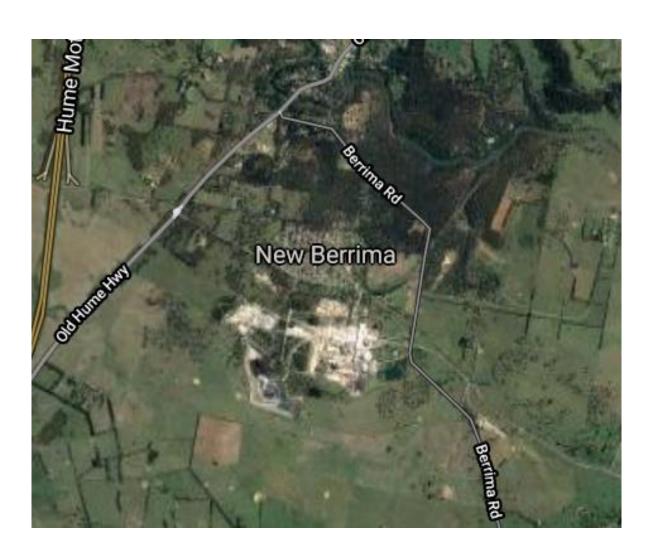

Berrima Cement – PIRMP-V8 41 of 44

APPENDIX 7.

POLLUTION INCIDENT NOTIFICATION LOG

Person undertaking (Name/Function):	notification					
Date and time when incident:	i first become awa	are of the				
Incident type:	Incident type:					
Comments:						
Initial immediate no	otification log					
Appropriate Regulatory Authority	Time of call	Respond name/fur		Approximat call duration		Comments
EPA						
Public Health Unit						
Fire and Rescue NSW						
Local Council						
WorkCover						
Other:						
Other:						
Summary of initial c	ommunication:					

Person undertaking notification (Name/Function):					
Date and time when additional information become available:					
Comments:					
Immediate notification	on of further pe	rtinent information	(if applicable)		
Appropriate Regulatory Authority	Time of call	Respondent's name/function	Approximate call duration	Comments	
EPA					
Public Health Unit					
Fire and Rescue NSW					
Local Council					
WorkCover					
Other:					
Other:					
Summary of addition	al communicatio	on			

BERRIMA CEMENT PIRMP- Immediate Reporting Contact Sheet

INTERNAL NOTIFICATIONS					
Name	Function	Phone number	Mobile number		
	Operations Manager				
	Technical Manager				
	HS Manager– Cement				
	Environment Manager – Cement				
	Environmental Business Partner - Cement				
	General Manager – Cement				

EXTERNAL NOTIFICATIONS				
Government Authority - compulsory notifications	Emergency notification phone number			
EPA – Environment Line	131 555			
Fire & Rescue NSW (FRNSW)	1300 729 579			
Wingecarribee Council	02 4868 0888			
Public Health Unit (South Western Sydney) – Liverpool SWS PHU	HealthLink (24 hr)- 1800 063 635 Head Office- Dubbo- 6841 5569			
WorkCover Authority of NSW	131050 Company ABN asked: 62 008 528 523			

NOTE: A full listing of contact phone numbers of other potentially relevant government agencies is included in the PIRMP.